



PRODUCT SPECIFICATION

GP GaN 100W Charger (4-port) Model: GM4A


Revision History

Revision	Date	Initiator	Reason for Change
0.0	27 Feb 2025	Joyce Tse	First release

Prepared By	Approved By
CC Li	Joyce Tse
Date: 25 Feb, 2025	Date: 25 Feb, 2025

Product Specification

Model no.: GM4A

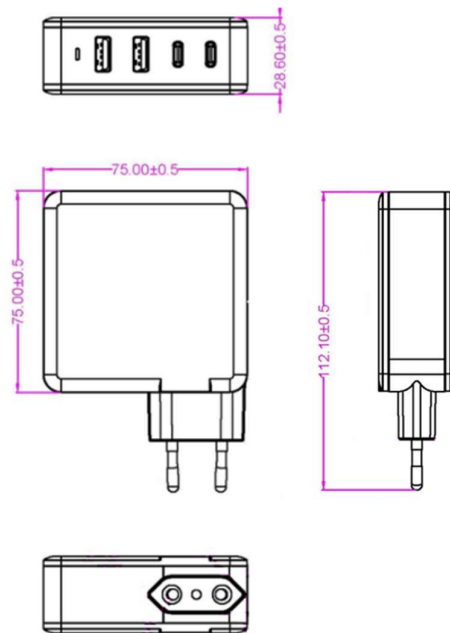

Unit: mm

Product Name	: 100W GaN Charger (4-port)
Description	: 100W GaN Charger, GS Plug (4-port)
Application	: Charge laptops, mobiles, tablets, cameras, Switch etc.
Number of USB ports	: USB-C x 2, USB-A x 2
Input	: AC 110-240V, 50/60Hz, 2.0A Max.
Output	: USB-C1/C2: 5.0V/9.0V/12.0V/15.0V 3.0A, 20.0V 5.0A (100.0W, Max.) USB-A1/A2: 5.0V 3.0A, 9.0V 2.0A, 12.0V 1.5A (18.0W, Max.) USB-C1 + USB-C2 (65.0W+30.0W, Max.) USB-A1 + USB-A2 (15.0W, Max.) 5.0V 3.0A USB-C1/C2 + USB-A1/A2 (65.0W+18.0W, Max.) USB-C1 + USB-C2 + USB-A1/A2 (45.0W+30.0W+18.0W, Max.) USB-C1/C2 + USB-A1 + USB-A2 (65.0W+ (15.0W), Max.) USB-C1 + USB-C2 + USB-A1 + USB-A2 (45.0W+30.0W+(15.0W), Max.)
Total output power	: 100.0W Max.
Over current protection (OCP)	: Yes
Over voltage protection (OVP)	: Yes
Short circuit protection (SCP)	: Yes
Over temperature protection (OTP)	: Yes
Operation Temperature	: 0°C to 25°C
Storage Temperature	: -10°C to 70°C
Product Dimension (+/-0.5mm)	: 112 (L) x 75 (W) x 28.6 (H) mm
Weight	: 285g
Compliance	: CE-LVD, CE-EMC, ErP, ROHS, REACH
Warranty Period	: 12 months from ex-factory date