

GP Batteries

PRODUCT SPECIFICATION

**USB Standard Charger
Model : E811**

Revision History


Revision	Date	Initiator	Reason for Change
0.0	31 Mar 2021	CC Li	Initial release

Prepared By	Approved By
CC Li	Vincent Lam
Date: 31 Mar 2021	Date: 31 Oct 2021


GP Batteries

Product Specification

Model no.: E811

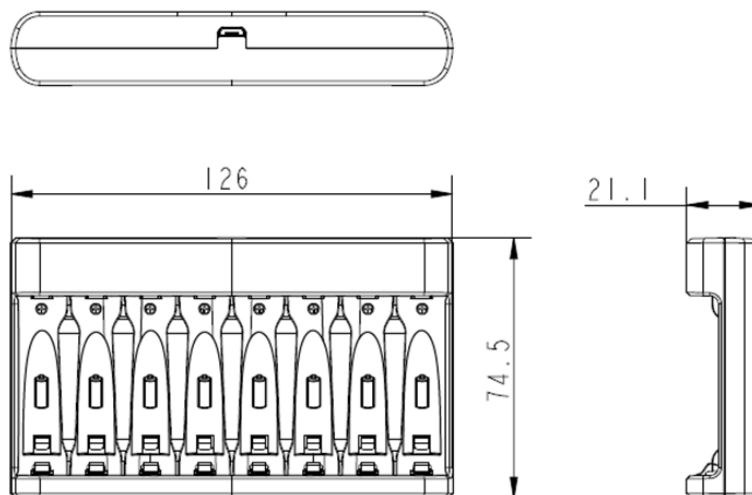

Product Name	:	USB 4-Slot Charger E811
Input	:	DC5V 1A
Charging Channels	:	4 independent channels ; 2 slots/channel for 2, 4, 6 or 8 pcs AA/AAA Ni-MH batteries
Output Voltage	:	2.8V
Charging Current	:	250mA approx for AA/AAA Ni-MH batteries
Charging Time	:	Approx. 550 Min for 2000mAh ; Approx. 1220 Min for 800mAh
Trickle Charging Current	:	50mA approx for AA/AAA Ni-MH batteries
Standby current at no input	:	<0.1mA
Operation Temperature	:	0°C to 35°C
LED Indication	:	Green LED ON for 0.5 second after just USB power input Charging in progress - Green LED slow flashing Fully charged – Green LED ON Bad/Primary Batteries inserted – Green LED fast flash
Safety protection	:	1) Timer protection – 14 hours 2) -dv
Dimensions	:	126 (L) x 74.5 (W) x 21 (H) mm
Weight	:	71 g (approx.)
Certification	:	CE, FCC, Rohs
Warranty Period	:	12 months from ex-factory date



Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.