



Model No.: **GP377F**

Type	: Mercury and Lead Free Alkaline Battery
Chemical System	: Zinc/Silver Oxide
Nominal Voltage	: 1.55V
Nominal Dimension	: $\Phi$ 6.80mm $\times$ 2.60mm
Applications	: Analog watch
Average Weight	: 0.4g
Data Code	: Unless otherwise specified, each cell will carry a numeric year code and an alphabetical month code.
Shelf Life	: Not less than 90% of the service capacity within first year, Not less than 85% of the service capacity within second year storage at $20 \pm 2^\circ\text{C}$ 45-75%RH.
Close Circuit Voltage	: 1.25 V(min.) (load resistor $300\ \Omega$ at $20 \pm 2^\circ\text{C}$ for 0.1 to 2 seconds)
Nominal Service Life (to 1.2V at $20 \pm 2^\circ\text{C}$ )	: 220hrs (at $15\text{k}\ \Omega$ load)
Average Service Capacity (to 1.2V at $20 \pm 2^\circ\text{C}$ )	: 25mAh (at $50\text{k}\ \Omega$ load)
Cross References:	
IEC	others
SR66	D377,377

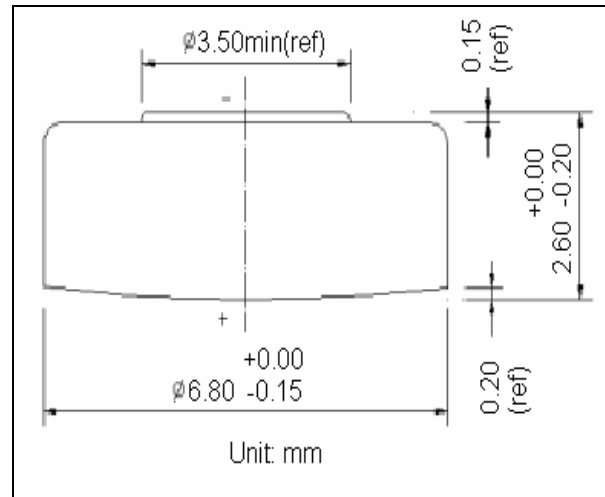

Typical Discharge characteristics at  $200 \pm 2^\circ\text{C}$

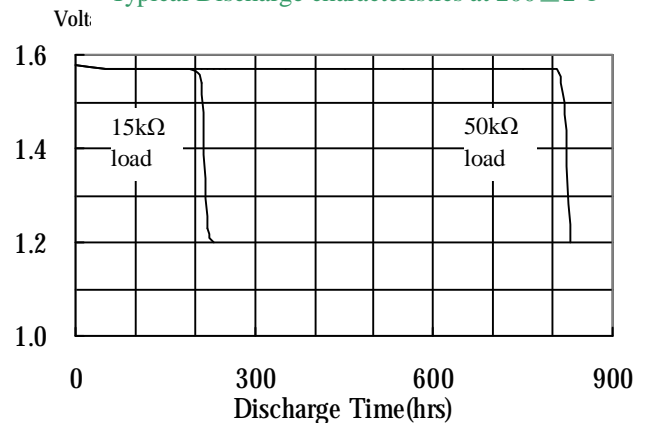

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.